


Micron's MT9V111 Image Sensor

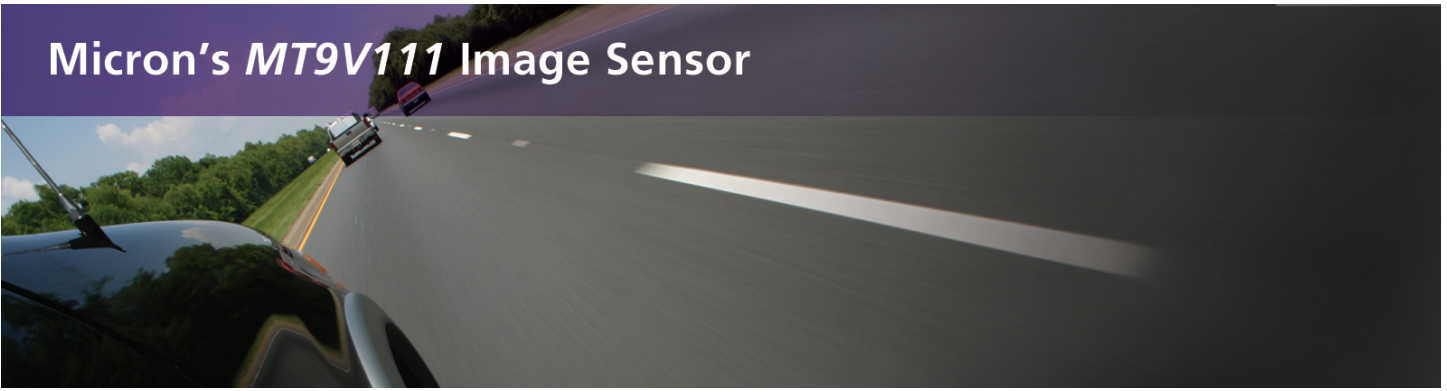

Increase Driver Awareness with a Crystal-Clear Second Set of Eyes

Micron's DigitalClarity® Image Sensor for Automotive Displays

With Micron's DigitalClarity® technology, our MT9V111 automotive image sensor helps increase drivers' awareness of what occurs in and around their vehicles. That's because our unique low-noise, stable-temperature design enables it to capture extraordinarily clear images. Needing less than the amount of light from a single candle, the MT9V111 outputs crisp images for automotive display applications that are just as effective on the darkest nights as on the brightest days:

- Rear video
- Blind spot assistance
- Side view
- Mirror replacement
- Parking assistance
- Passenger viewing
- Accident reconstruction

Use Automotive Sensors for Automotive Imaging

The performance requirements of automotive image sensors differ from those of PC cameras and digital cameras. We designed the MT9V111 for the extreme automotive environment. It boasts an operating temperature range of -40°C to +85°C. It comes in a 52-pin iBGA package that stands up to automotive environmental standards. And it outputs full-color video at VGA resolution, so drivers can clearly identify scenes on automotive displays.

All-Inclusive Camera System Reduces Parts and Costs

The MT9V111 is a complete camera system-on-a-chip (SOC). Its programmable on-chip processor performs extensive camera functions including color recovery and correction; gamma correction; sharpening; auto black level offset correction; auto exposure, lens shading, flicker detection and avoidance, white balance; and on-the-fly defect identification and correction. With all the necessary functionality built in, this all-in-one solution reduces the bills of materials and the costs of driver awareness systems.

Speak with Dedicated Automotive Imaging Experts


At Micron, we understand automotive subsystem suppliers and car manufacturers need a dedicated source for image sensors. One who manufactures parts based on automotive specifications. One who will remain committed over long development schedules. And one who knows the automotive market.

For a fully integrated, high-performance automotive image sensor, call Micron now at 208-368-3900. Let our dedicated experts show you the technical details of the MT9V111 and how it can enhance your driver awareness systems.

Specifications

● Pixel Size:	5.6µm x 5.6µm	● ADC:	10-bit, on-chip
● Array Format (Active):	640H x 480V	● Data Rate:	12–13.5 megapixels per second (master clock, 24–27 MHz)
● Imaging Area:	3.584mm x 2.688mm	● Responsivity:	1.9 V/lux-sec (550nm)
● Color Filter Array:	RGB Bayer color filters	● Data Output Formats:	ITU_R BT.656 (YCbCr), YUV 4:2:2 (progressive), 656RGB, 555RGB, and 444RGB
● Optical Format:	1/4 inch (4:3)	● Dynamic Range:	60dB
● Frame Rates:	30 fps @ 640H x 480V	● Maximum Analog Gain:	16
● Scan Mode:	Progressive	● Supply Voltage:	2.8V ±0.25V
● Shutter:	Electronic rolling shutter (ERS)	● Power Consumption:	<120mW (@ 30 fps)
● Window Size:	Programmable to VGA, QVGA, CIF, and QCIF	● Operating Temp. Range:	-40°C to +85°C
● Automotive Functions:	Exposure, white balance, black level offset correction, flicker avoidance, color saturation, defect identification and correction, frame rate, and back light compensation	● Storage Temp. Range:	-40°C to +125°C
● Programmable Controls:	Gain, frame rate, ADC reference, left-right and top-bottom image reversal	● Package:	52-ball iBGA, die in reconstructed wafer form, automotive-qualified

Block Diagram

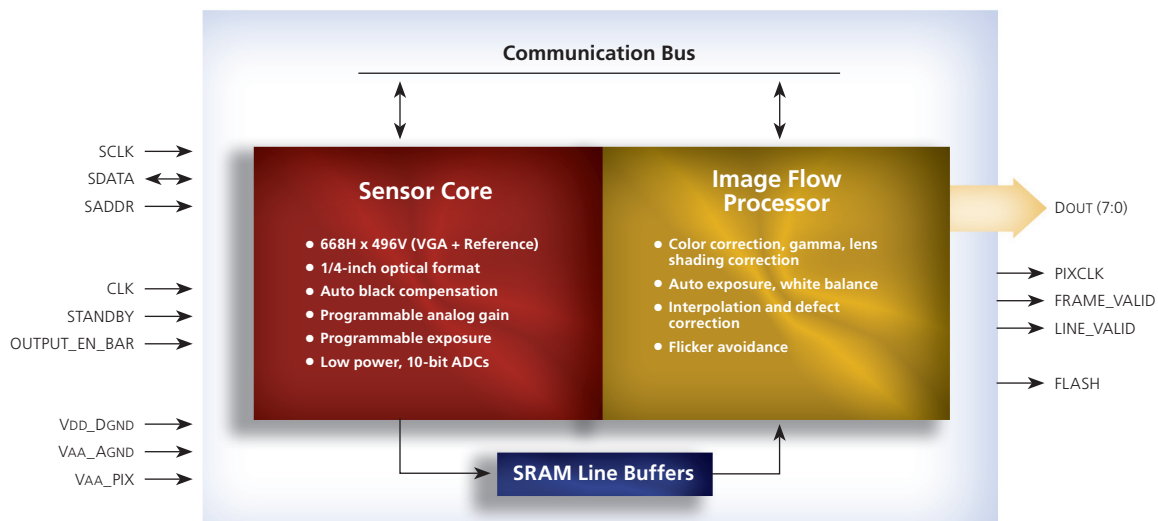

www.micron.com

Products are warranted only to meet Micron's production data sheet specifications. Products and specifications are subject to change without notice.

Micron, the Micron logo, and DigitalClarity are trademarks of Micron Technology, Inc. All other trademarks are the property of their respective owners. ©2004 Micron Technology, Inc. All rights reserved. 06/08/05 EN.L

